


DW-LP LED INSTALLATION INSTRUCTIONS

Surface Mount / 45 Degree / Pendant Mount

- Surface Mount Standard Bracket (Standard, provided)
- 45 Degree Mount (Option **45D**)
- Single Pendant with 3/4" Threaded Hub (Option **SP**) - for use with 1/2" Stem. 2FT unit only.
- Double Pendant with 1/2" Threaded Hub (Option **DP**) - for use with 3/8" threaded rod. 4FT and 8FT unit only.
- Chain or Cable Mount Bracket (Option **CCP**)

Standard Surface Mount Bracket

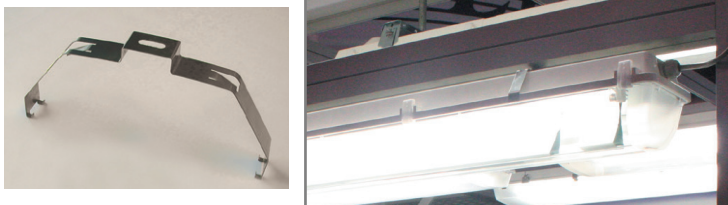

45 Degree Mount (45D)



Single Pendant (SP) Double Pendant (DP)



- * 1/2" pipe for single(2FT unit only)
- 3/8" threaded rod for double (4FT and 8FT unit only)
- (threaded rod provided by others)

Chain / Cable Mount (CCP)



- * Chain / Cable provided by others

* Any damage caused from improper installation will void warranty and not be accepted for RGA (Return Goods Authorization). Improper installation includes but not limited to field-drilled hole(s), improper latch closure and any damage caused during installation.

Contractor is responsible for adequately reinforcing ceilings to support luminaire weight. Utopia Lighting accepts no responsibility for inadequately reinforced ceilings. The information contained in this drawing is the sole property of Utopia Lighting. Any reproduction in part or whole without the written permission of Utopia Lighting is prohibited and warranty is voided.

