

DWP1-2G

Project Name:	
Type:	



APPLICATION

The polycarbonate optical lens with UV stabilizers lens LED wall pack is ideal for security, pathway and perimeter lighting, and building entryways and walkways.

FEATURES:

- Sealed die-casting profile for indoor and outdoor.
- Housing with 3 pieces of 1/2" threaded hole for easier wire connections.
- Dark bronze finish is standard.

MOUNTING:

- Wall mounting only.
- Suitable for junction box mounting and surface mounting.

COVER:

- Polycarbonate clear optical lens with UV stabilizers prevent from yellowing and deformation.

LED:

- Lumileds 3030 LED chips.
- Color temperature: 4000/5000 (K)
- Lumen efficiency: up to 128lm/W
- Color rendering index: >70
- Life span: 50,000 hrs

ELECTRICAL:

- Non-dim is standard.
- 0-10V dimming is optional, please see the wattage difference on dimmable models. ⁴
- Input voltage: 120-277Vac., 50/60Hz
- Operating temperature: -40°C to 40°C (-40°F to 104°F)
- Surge protection: Line-Line 1kV, Line-Earch 2kV
- Optional photocell.
- UL 1310 listed.

LISTING:

- UL / cUL listed.
- Listed to UL 1598 and UL 8750.
- DLC listed. ¹
- Suitable for wet location.
- 5 years limited warranty.
- ARRA compliant (optional).

CONFIGURATIONS

Series	LED	NON-DIM					0-10V DIM					Weight
		AC INPUT	Lumen Output (4000K)	Lumen Efficiency	Lumen Output (5000K)	Lumen Efficiency	AC INPUT	Lumen Output (4000K)	Lumen Efficiency	Lumen Output (5000K)	Lumen Efficiency	
DWP1-2G	30LED	30W	N/A	N/A	3600 lm	120 lm/W	N/A	N/A	N/A	N/A	N/A	6.3lb / 2.8 kg
	40LED	40W	5000 lm	125 lm/W	5100 lm	128 lm/W	45W	4900 lm	109 lm/W	4900 lm	109 lm/W	6.5lb / 2.9 kg
	65LED	65W	7800 lm	120 lm/W	7900 lm	122 lm/W	70W	7800 lm	111 lm/W	7800 lm	111 lm/W	6.7lb / 3 kg
	90LED	90W	N/A	N/A	N/A	N/A	90W	9900 lm	110 lm/W	9900 lm	110 lm/W	7.32lb / 3.3kg
	125LED	125W	N/A	N/A	15000 lm	120 lm/W	135W	N/A	N/A	15100 lm	112 lm/W	8.15lb / 3.7kg

ORDERING INFORMATION

EXAMPLE: DWP1-2G-40LED-50K-UNV-BZ

MODEL	LED	COLOR TEMP.	VOLTAGE	DRIVER	FINISH
DWP1-2G	30LED 40LED 65LED 90LED 125LED	30W LED ^{3,5} 40W LED 65W LED 90W LED ⁶ 125W LED ³	-40K 4000K -50K 5000K (Std.)	UNV 120-277V	(Blank) DM Non-dim 0-10V dimming ⁴ BZ *BK *WH *GR **CC Dark Bronze RAL#8019 (Std.) Black RAL#9011 White RAL#9016 Gray RAL#7045 Custom Color <small>* Non-standard finish with extra charge. ** Additional charge & set up fee.</small>



OPTIONS	
PC	Photocell
EMG8W	8W EM Battery Backup ²
O7W	Optional 7 Years Limited Warranty
BG	Bird Guard, Stainless Steel Spikes
ARRA	Assembled in USA for Buy American act

NOTES:

1. DesignLights Consortium (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
2. Available with 30/40/65LED.
3. Only available with 5000K.

4. Changes to the AC input of the dimmable models:
40LED (40W) to 45W
65LED (65W) to 70W
90LED (90W) remain the same
125LED (125W) to 135W
5. Available in non-dim only.
6. Available in dimmable only.

DWP1-2G

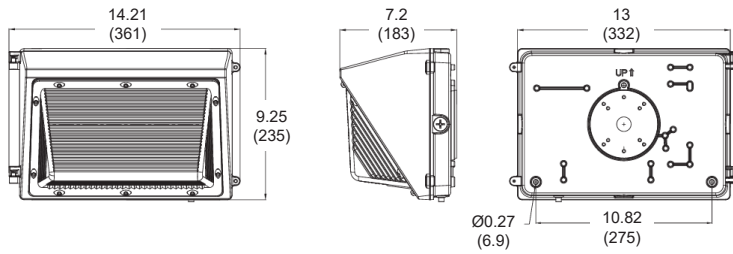

* All dimensions are in inches (millimeters).