

SMART WIFI SYSTEM



"Hey, Google."



"Hey, Alexa."

APP information



- Compatible with: Tunable White (-2762K), RGB, RGBW
- Support iOS & Android
- Wi-Fi
- Groups / Scene settings, Multiple users
- Compatible with Google Home & Amazon Alexa



Android 4.0




iOS 8.1


* The app is compatible with Android 4.0 and IOS 8.1 and higher.

Wi-Fi Controller Specifications

	-2762K (Tunable White)	RGB	RGBW
Input Voltage	DC 24V constant voltage		
Dimming Type	PWM		
Dimming Range	5 - 100%		
Signal Type	Wi-Fi		
Operating Frequency	2.4 GHz		
Operating Temperature	-4°F to 113°F (-20°C to 45°C)		
Environment	IP20, indoor / dry location only		
Warranty	2 Years		
Features	Timer, multiple users, scene creation, grouping		
Dimensions	L: 3-15/16" (100mm) x W: 19/16" (39mm) x D: 7/8" (22.2mm)		

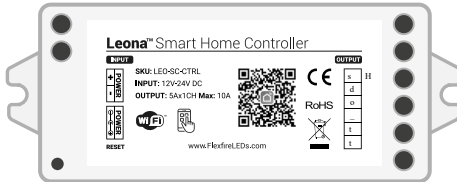

Set-up Installation

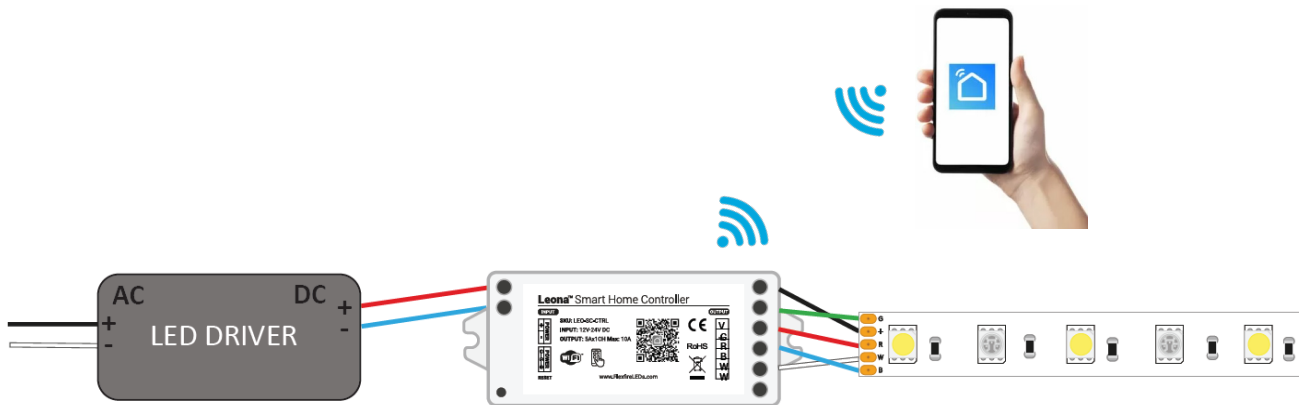

* Provided inside the fixture


* Provided, shipped separately for field installation.

DO NOT place in any kind of metal enclosure.

* Refer to SMAFI installation instructions.

* Provided inside the fixture

SMART WIFI SYSTEM



Download Phone App

1. Search for the "Smart Life" app from the IOS App Store or Google Play Store.



2. Scan the QR code from the product label or user manual below.



Android 4.0





iOS 8.1

* The app is compatible with Android 4.0 and IOS 8.1 and higher.




Log In / Register Account

1. Open the Smart Life app.
2. Sign up for a new account or log in with an existing account.

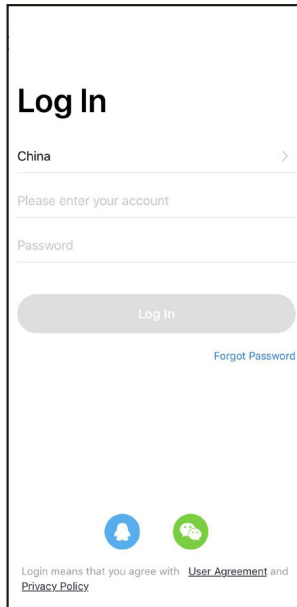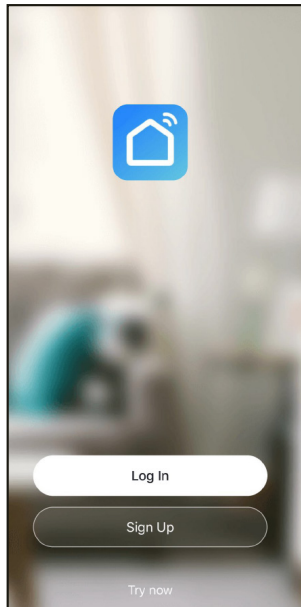


SMART WIFI SYSTEM




Connect to the App

1. Apply power to your controller and light strip. Once connected to WiFi, ensure that you have a good signal and follow the prompts on the app.
2. The LED strip will flash when power is applied.
Follow the prompt to add a new smart device by either manually adding the product or allowing the app to scan for a new device over WiFi.
3. If the LED strip is not flashing when power is applied, press down on the "Reset" button for more than 5 seconds. While the strip flashes, this is the time to add your device to the app.

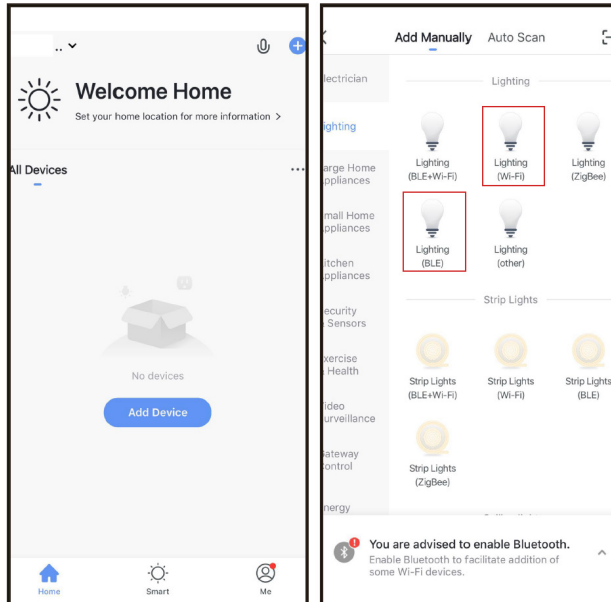

4. Please confirm that the phone and controller are using the same WiFi network and that the WiFi being used is a 2.4G signal.
If the WiFi signal is in 5G mode, click "Compatibility Mode" in the upper right hand corner of the "Confirm the Light Flashing" screen.
5. Select the WiFi network connected to the smart device and input the WiFi password. Click "Next" to continue pairing the device.

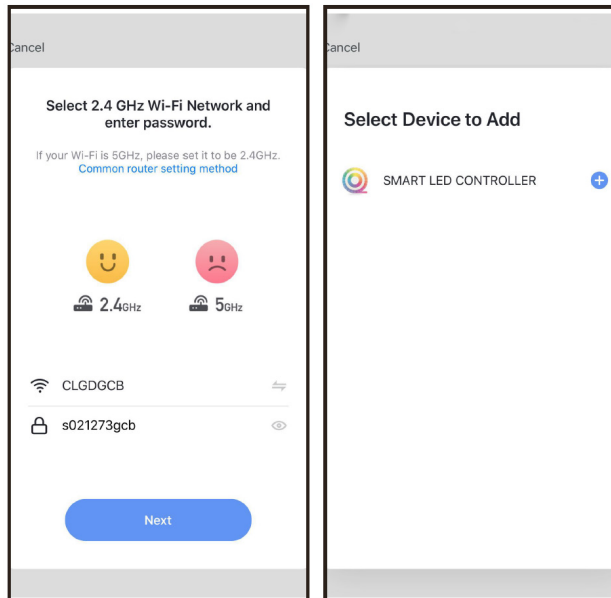

SMART WIFI SYSTEM




“Hey, Google.”





“Hey, Alexa.”

6. Once pairing is complete, you are now able to pair your smart home controller with third-party smart home apps such as Google Home and Amazon Alexa. Within the Smart Life app, however, there are a variety of functions such as dimming, scene control, timers, account sharing and more. Functionality will depend on the model of controller and strip that you have purchased.

Tunable White (-2762K)

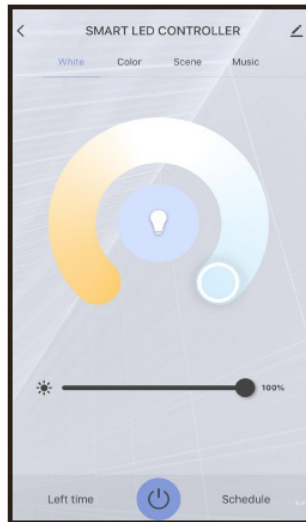

RGB & RGBW

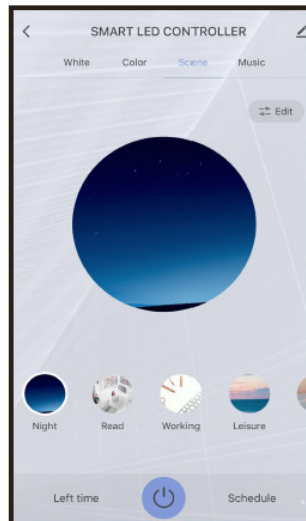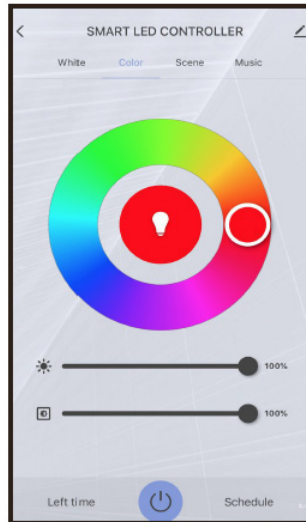

SMART WIFI SYSTEM



“ Hey, Google.”



“ Hey, Alexa.”

Warranty Information

Limited Warranty:

This product has a 2-year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference - fixture, LED strips, LED driver and any other additional components. For warranty-related questions please contact the support team at tech@utopialightingus.com.

Consumer's Acknowledgment

Utopia Lighting stands behind its products when they are used properly and accordingly to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the customer. This limited warranty does not include product failures that are the result of: Not using a voltage-regulated power supply to connect the LED product or controls; Connecting LED products to the wrong output voltage; Improper connection of power supplies, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power supplies backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or “force majeure” incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed/approved by someone other than Utopia Lighting will void this warranty.