


DWP4

Discontinued - limited stock available



APPLICATION

The medium wall pack is ideal for both commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways or loading docks.

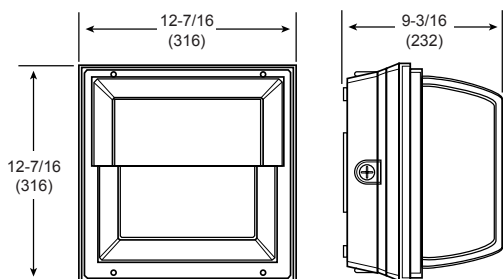

Specifications: DWP4

Height: 9-3/16 (232)
Width: 12-7/16 (316)
Depth: 12-7/16 (316)

All dimensions are in inches (millimeters).

FEATURES:

- Die-cast aluminium housing, Injection-molded polycarbonate diffuser. Door frame holds lens and seals housing gasket.
- Housing with 1/2" feed-through hubs provided.
- Housing has waterproof bar of EVA included to prevent any leakage and wet location.
- Dark bronze powder paint finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- High impact polycarbonate (with UV) clear prismatic diffuser.

LAMP:

- Vertical lamp position, HID Lamps have medium base (E26 BD/ED17) porcelain socket with screw shell and center contact.
- Compact fluorescent GX24q 4-pin base lamp option.
- Lamp included.

ELECTRICAL:

- Compact fluorescent lamps use a multi-voltage (120-277V) electronic, sound rate A, high power factor ballast ambient operating temperature of -20°F (-30°C).
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

LAMP CONFIGURATIONS		
	CFL	HID
DWP4	132, 142, 242	M70, M100, M150, M175 H70, H100, H150

ORDERING INFORMATION

EXAMPLE: DWP4-M100-120-BZ

MODEL	LAMP TYPE				BALLAST	
DWP4	M70	70W Metal Halide	H70	70W High Pressure Sodium	(Blank) PS SCWA	Standard Pulse Start ¹ Super CWA Pulse Start Ballast ²
	M100	100W Metal Halide	H100	100W High Pressure Sodium		
	M150	150W Metal Halide	H150	150W High Pressure Sodium		
	M175	175W Metal Halide				
			132	(1) CF32 TRT, 4-Pin		
			142	(1) CF42 TRT, 4-Pin		
			242	(2) CF42 TRT, 4-Pin		
VOLTAGE		FINISH		OPTIONS		
120	120V	BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ⁴	
208	208V	WH	White	F2	Double Fuse (208, 240 or 480V only) ⁴	
240	240V	BK	Black	PC1	With Photocell - Button Type 120V	
277	277V		Available custom color (RAL) Please provide us with the RAL number.	PC2	With Photocell - Button Type 277V	
347	347V			EM	Emergency Ballast ⁵	
480	480V			ARRA	Assembled in USA for Buy American Act	
QT	120/208/240/277V			TR	Tempered Screw	
UNV	120-277V ³					

NOTES:

1. For pulse start Metal Halide only.
2. Super CWA available on 150 and 175 only.
3. Multi-voltage for compact fluorescent (120-277V).
4. Must specify voltage.
5. Only for compact fluorescent unit. (Emergency Ballast options, see page 79).