

LAP-3G

Project Name:	
Type:	



APPLICATION

For all applications in site, area, and general lighting requiring high uniformity, excellent vertical light distribution, reduced offsite visibility, reduced on-site glare and effective security light levels. The LAP luminaire delivers exceptional performance in a low-profile design.

FEATURES:

- Die-cast aluminium construction body on which electrical components.
- Die-cast integral heat sink to provide thermal management.

MOUNTING:

- PMS: Pole mount arm available for 3", 4" and 5" square pole.
- PMR: Pole mount arm available for 3" (PMR3), 4" (PMR4) and 5" (PMR5) dia. round pole.
- SF: Adjustable slip fitter mount available for pipe installation (1-21/32" O.D to 2-3/8" O.D)
- WM: Wall mount plate.
- Mounting arm bolts are 304 stainless steel and zinc-plated steel.
- MA: Available for 2.375"(O.D) sized Mast Arm Pole.
- MA2: Available for 1.900"(O.D) sized Mast Arm Pole.

LED:

- Color Temperature: 3000 / 4000 / 5000K
- Color Rendering Index: 70+ CRI.
- Lumileds LED.
- Lifetime: over 50,000 hours.
- Optical lens is used to reduce glare.

ELECTRICAL:

- UL, FCC certified input voltage range: 100V-277V, 50/60HZ
- Power factor >90%, THD <20%
- Operating temperature: -20°C to 50°C (-4°F to 122°F)
- Provided with integrated surge protection (6kV line-line, 10kV line-earth).
- Optional integrated 10kV/10kA surge protection available (SP10).
- Over Voltage Protect : Hiccup mode. The power supply shall return to normal operation only after the power is turn-on again.
- Short Circuit Protect : No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.
- Waterproof (IP67) and UL Dry / Damp / Wet Location outdoor LED driver.
- RoHS compliant.
- Complies with Part 15 of the FCC Rules (meets 47 CFR 15, Class B).

OPTIC:

- UV stabilized polycarbonate lens.


LISTING:

- UL / CUL listed.
- Listed to UL 1598 and UL 8750.
- DLC listed. ³
- IP65 rated.
- ARRA compliant (optional).
- BAA compliant (optional).
- Tested to IESNA LM80 standards.
- 5 years limited warranty.
- 7 or 10 years limited warranty. (optional) ⁴
- Certified to ANSI C136.31-2010, 3.0G Level 2 for Bridge/Overpass Applications (PMS mounting).

CONFIGURATIONS

	Type	Nominal Input (W)	Total Lumen Output	Lumen Efficiency (lm/w)	EPA Rating (w/o photocell)	EPA Rating (w/ photocell)	B.U.G. Rating	Weight (lbs/kg)
100	T3VS	93W	12649 lm	136	0.55	0.6	B2-U0-G3	14.7 lbs / 6.7 kg
	T3M		12090 lm	130			B1-U0-G2	
	T4M	95W	12786 lm	134			B2-U0-G3	
150	T3VS	139W	18906 lm	136	0.63	0.67	B1-U0-G1	19.8 lbs / 9 kg
	T3M		18070 lm	130			B1-U0-G2	
	T4M		17931 lm	129			B1-U0-G2	
200	T3VS	189W	25706 lm	136	0.71	0.75	B1-U0-G1	22 lbs / 10 kg
	T3M		24570 lm	130			B1-U0-G2	
	T4M		24381 lm	129			B1-U0-G2	

LAP-3G

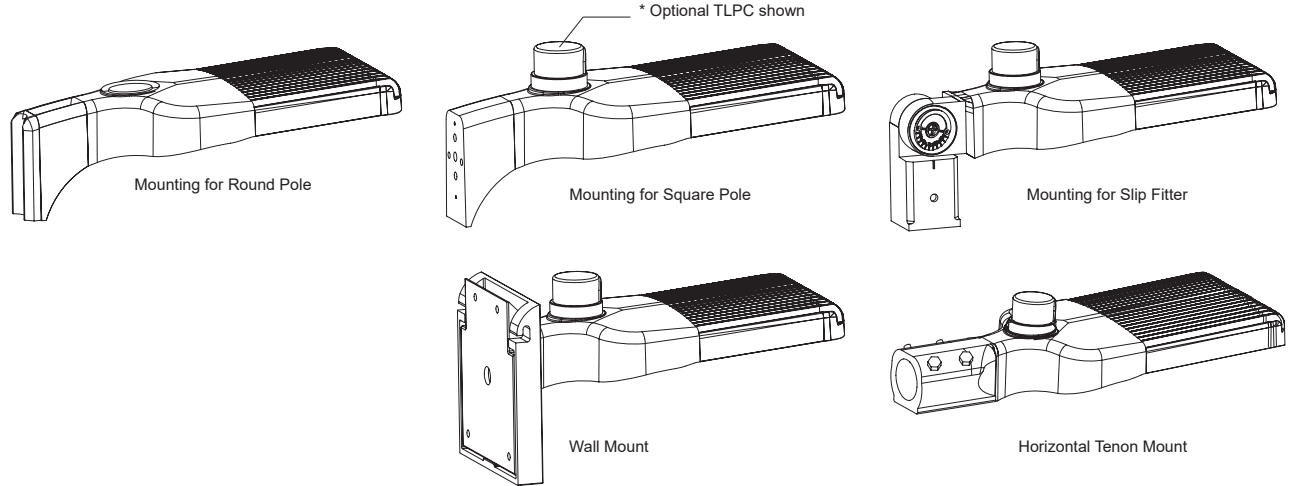

* Effective Projected Area (EPA) with Square Pole Mounting.

ORDERING INFORMATION

EXAMPLE: LAP-3G-100ED-50K-T4M-UNV-DM-BZ-WM

MODEL	LED	COLOR TEMP.	DISTRIBUTION	VOLTAGE	DIMMING	FINISH
LAP-3G	100LED	100W	-30K	3000K	T3VS	BZ Dark Bronze RAL#8019 (Std.) GR Gray RAL#7036 WH White RAL#9003 BK Black RAL#9011 <small>* Available custom color (RAL) Please provide us with the RAL number. * Non-standard finish with extra charge.</small>
	150LED	150W	-40K	4000K	T3M Type III Medium T4M Type IV Medium	
	200LED	200W	-50K	5000K (Std.)		
	xxxLED	Customized Wattage/ Lumen package ⁹	AMB	Amber LED ¹²		

MOUNTING		OPTIONS			
SF Slip Fitter WM Wall Mount PMS Square Pole Mount Arm PMR3 3" Round Pole Mount Arm PMR4 4" Round Pole Mount Arm PMR5 5" Round Pole Mount Arm MA Horizontal Tenon Mount (Mounts to 2" IP, 2.375" O.D.) MA2 Horizontal Tenon Mount (Mounts to 1-1/2" IP, 1.900" O.D.)	HS House Shield RC NEMA twist-lock receptacle only (no controls) RC7 NEMA 7-wire receptacle only (no controls) TLPC3 3-Pin Receptacle and Twist Lock Photocell Installed 120V-277V TLPC4 3-Pin Receptacle and Twist Lock Photocell Installed 480V TLPC-SC Shorting Cap RS Remote handheld configuration tool for FSP-211 <small>* Contact Factory for more options</small> SP10 Integrated 10kV/10kA surge protection FSP-211 0-10V Dimming Control Occupancy Sensor ^{1,2} (L2) FSP-L2 Lens @ 8' height (up to 44' diameter) (L3) FSP-L3 Lens @ 20' height (up to 40' diameter) (L7) FSP-L7 Lens @ 40' height (up to 100' diameter)	LRD-309S-x 0-10V Dimming Control Multi-level high/low step dim and Smart dim Occupancy Sensor (*IR remote programmable). (See note 7 to select lens for "x") ^{6,8} LRD-509S-x IP-66 rated integrated 0-10V SmartDIM or multi-level high/low dim control occupancy sensor (*IR remote programmable). (See note 7 to select lens for "x") ^{6,8} RS-LRD Remote programmer for LRD-509S and LRD-309S PSC-BLE-SR McWong 0-10V Bi-level passive infrared (PIR) occupancy sensor with dim-to-off for Bluetooth Mesh in Silvalair enabled ARRA Assembled in USA for Buy American act BAA BAA(Buy American Act) and BABA(Build America Buy America) compliant BR Bird Guard, Stainless Steel Spikes O7W Optional 7 Years Limited Warranty ⁴ O10W Optional 10 Years Limited Warranty ⁴ REM16 Remote 16W Emergency Battery Backup (CEC Compliant EM) in black finish ^{10, 11}			


NOTES:

- Must specify lens. (L2, L3, L7)
- Default settings are Title 24 compliant for all spaces that do not require daylighting.
For spaces that do require it, adjustments will be necessary for the Hold Off Setpoint and the Photocell functions.
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified.
Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation.
- Standard dimming 0-10V, ANSI C136.41, Photocell and shorting cap by others.
- Its default setting can be found on the IR-TEC installation instructions.


- A:** Standard cone shape Lens @ 15' height (up to 30' coverage)
- B:** Extra wide cone shape Lens @ 10' height (up to 60' coverage)
- C:** High bay cone shape Lens @ 30' height (up to 90' coverage)
- D:** Standard round shape Lens @ 20' height (up to 40' coverage)
- F:** Extra wide dome shape Lens @ 20' height (up to 80' coverage)
- G:** Aisle way arch shape Lens @ 40' height (up to 120' coverage)
- H:** High bay dome shape Lens @ 50' height (up to 50' coverage)
- Order "RS-LRD" to adjust sensor setting.
- DLC is not available.
- Only available with Wall Mount.
- Remote Box is UL1598 recognized, IP66, IP67 rated, and ambient temperature up to 55°C.
- The proportion of radiated power in the 400nm-500nm segment is calculated to be 1.2%

LAP-3G


LAP-3G-100LED-T3M

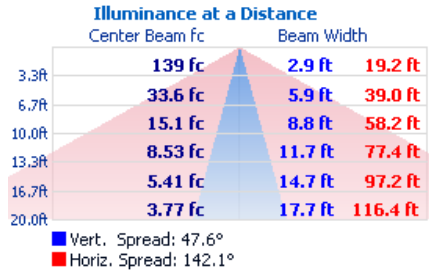


LAP-3G-100LED-T3VS

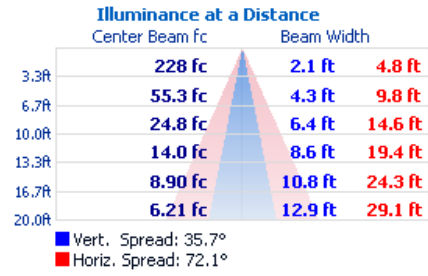


LAP-3G-100LED-T4M

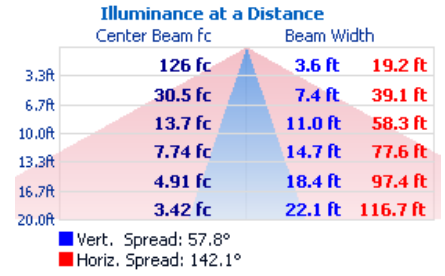


LAP-3G-150LED-T3M

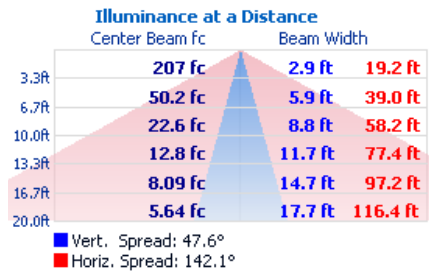


LAP-3G-150LED-T3VS

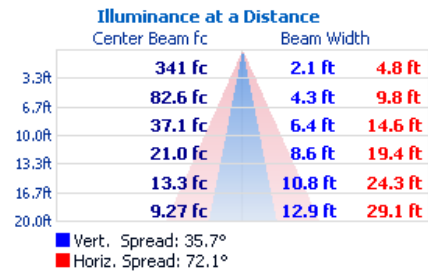


LAP-3G-150LED-T4M

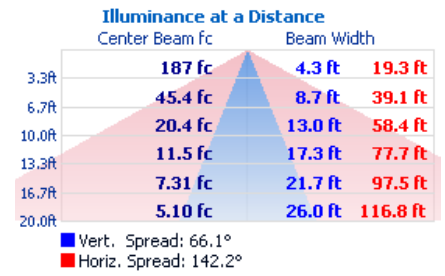


LAP-3G-200LED-T3M

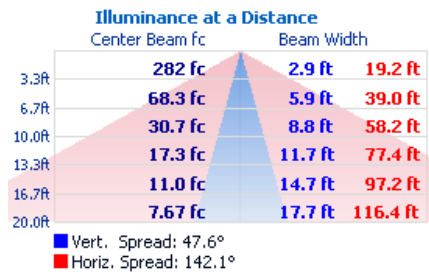


LAP-3G-200LED-T3VS

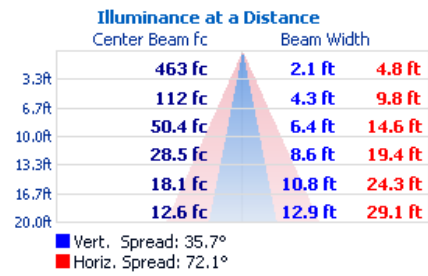


LAP-3G-200LED-T4M

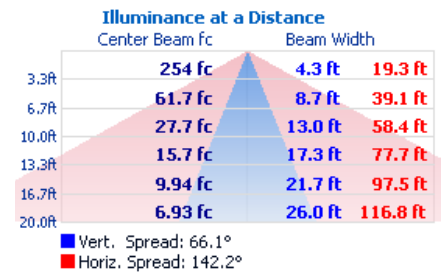


LAP-3G

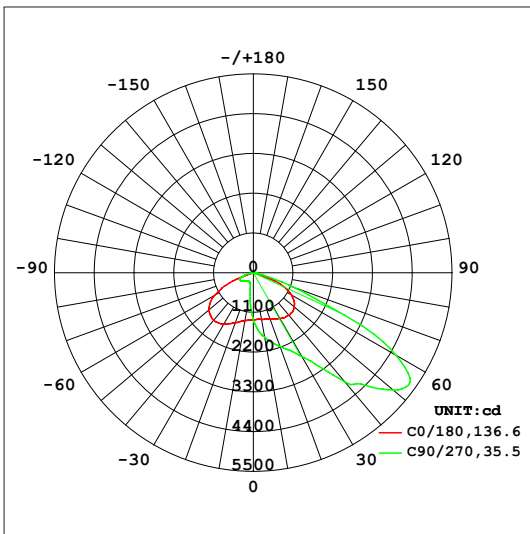

T3VS

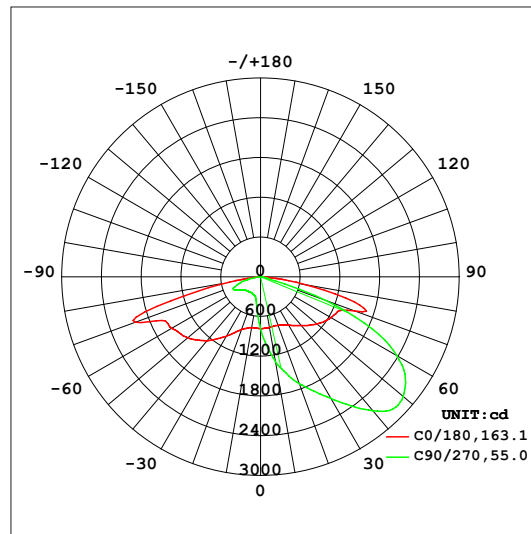











T3M

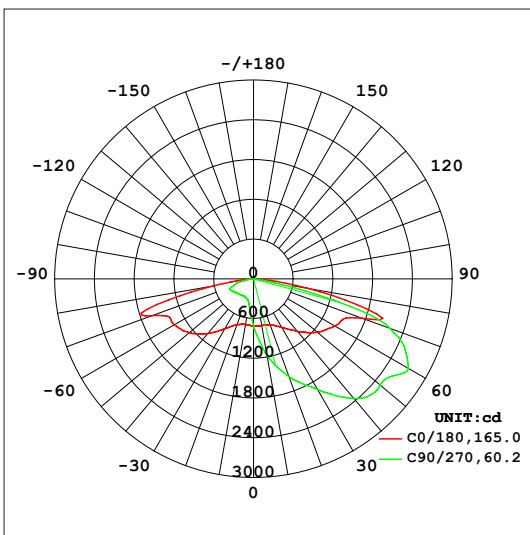

T4M











LAP-3G

100W

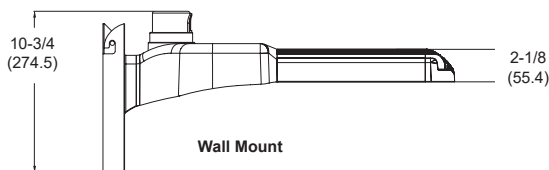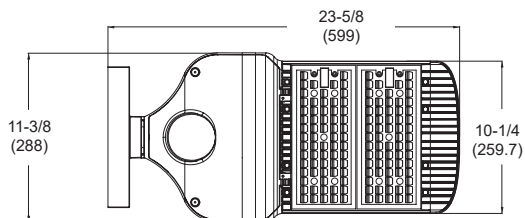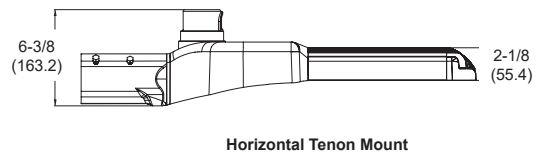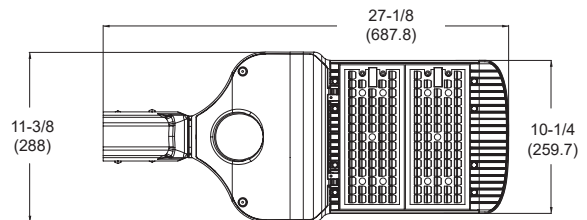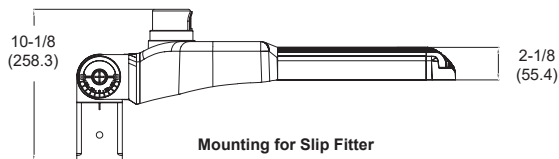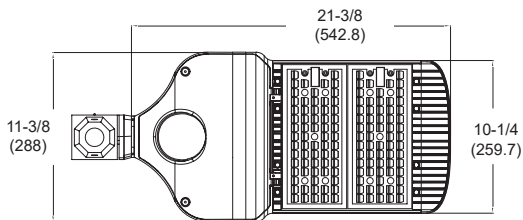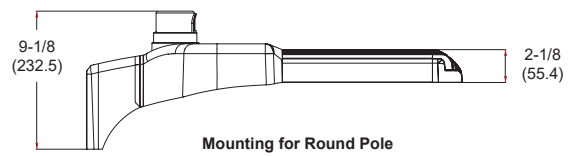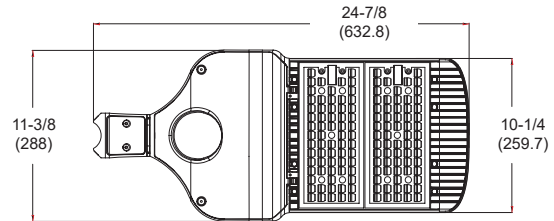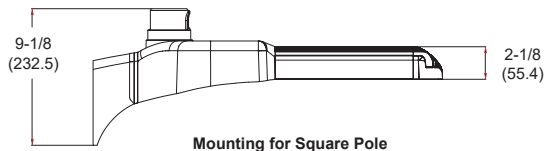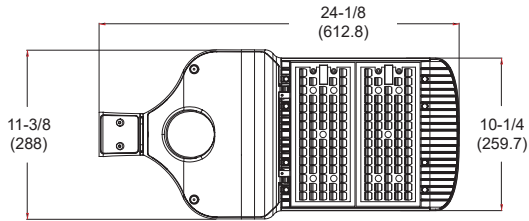

LAP-3G

150W

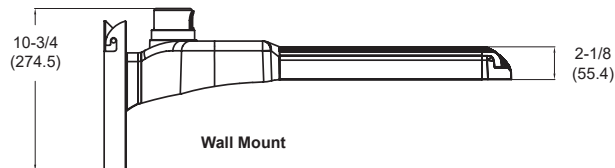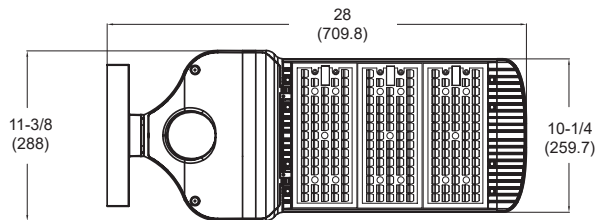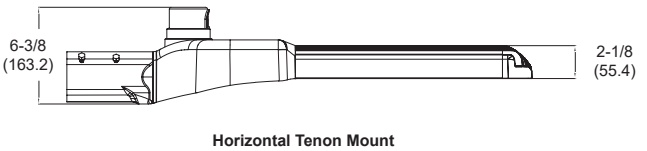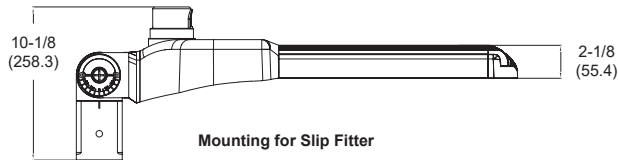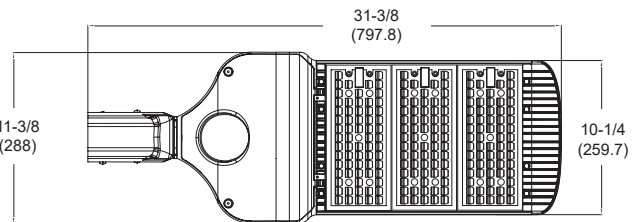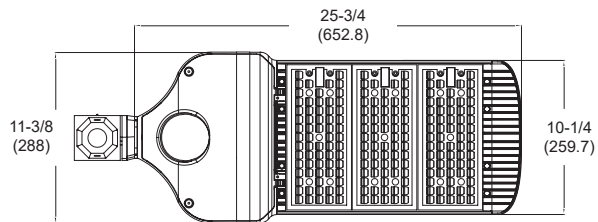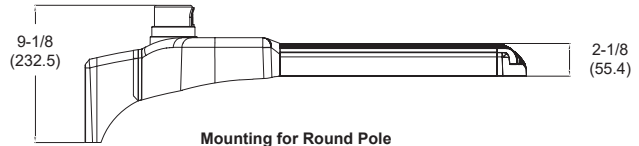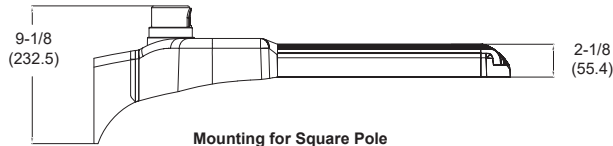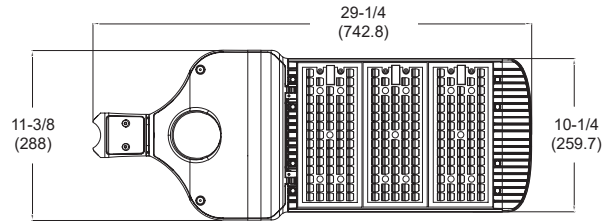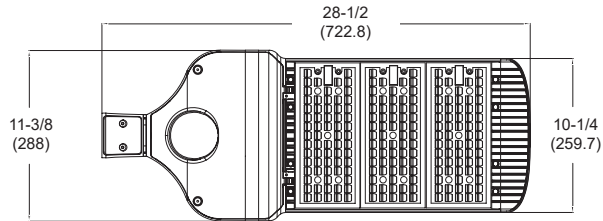

LAP-3G

200W

