

LWP2

Project Name:	
Type:	



APPLICATION

The borosilicate glass lensed wall pack is ideal for both commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

FEATURES:

- Die-cast aluminum housing and hinged door frame with prismatic borosilicate glass lens refractor.
- Door frame holds lens and seals to housing gasket with two stainless steel screws.
- Anodized aluminum reflector with wide beam spread.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered clear prismatic glass lens.

LAMP:


- HID lamps will have mogul base (E39) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

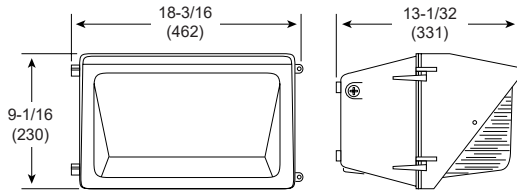

Specifications: LWP2

Height: 9-1/16 (230)
 Width: 18-3/16 (462)
 Depth: 13-1/32 (331)
 Weight: 17.66 lbs (8.01 kg)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: LWP2-M250-QT-BZ

MODEL	LAMP TYPE	BALLAST	VOLTAGE	FINISH
LWP2	M250 250W Metal Halide	(Blank) Standard PS Pulse Start ¹ SCWA Super CWA Pulse Start Ballast ²	120 120V	BZ Dark Bronze (Std.) WH White BK Black <small>* Available custom color (RAL) Please provide us with the RAL number.</small>
	M400 400W Metal Halide		208 208V	
	H250 250W High Pressure Sodium		240 240V	
	H400 400W High Pressure Sodium		277 277V	
			347 347V	
	480 480V	QT 120/208/240/277V		

OPTIONS			
F1 Single Fuse (120, 277 or 347V only) ³	ARRA	BG	Assembled in USA for Buy American Act Bird Guard, Stainless Steel Spikes
F2 Double Fuse (208, 240 or 480V only) ³			
PC1 With Photocell - Button Type 120V			
PC2 With Photocell - Button Type 277V			

NOTES:

1. For pulse start metal halide.
2. Super CWA available on metal halide only.
3. Must specify voltage.