

SVL



Project Name:	
Type:	

APPLICATION

Wall or ceiling in corridors light. Acrylic diffuser with metal end caps. Ideal for use in public areas, corridors, locker rooms, laundry, bathrooms and work areas.




FEATURES:

- Aluminum end caps and an aluminum body.
- Extruded matte white acrylic diffuser.
- Natural aluminum finish as standard (AL)


MOUNTING:

- Surface wall mounting.
- Horizontal or vertical mount.
- Provided a universal mounting back for a standard 3" plaster ring or switch-box.



LAMP:

- Standard T5 lamps are available.
- Lamp: 1 or 2 lamps.
- Pressure-lock lamp holders or easy twist lock lamp sockets.
- Lamp not included.

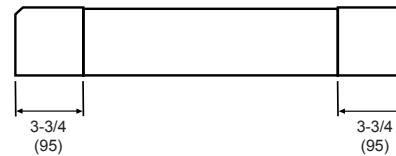

ELECTRICAL:

- High power factor programmed start electronic ballast for T5 lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- Ballast disconnect plug provided as standard.

Specifications: 1, 2 Lamps

Length: 23-7/8 (606)
 35-7/8 (911)
 47-7/8 (1216)

Width: 4 (101)
 Height: 4 (101)

All dimensions are in inches (millimeters).

ADA COMPLIANT:

- ADA requires all fixtures below 68" to have a maximum projection of 4".

LISTING:

- UL listed and labeled.
- Suitable for damp locations.
- ADA compliant.
- ARRA compliant (optional).

INDOOR

ORDERING INFORMATION

EXAMPLE: SVL-2-14T5-UNV-AL

MODEL		# OF LAMPS	LAMP TYPE		BALLAST	
SVL	1	2	14T5	F14T5 (22")	(Blank)	T5 Electronic Ballast, Programmed Start, <10% THD
	2		21T5	F21T5 (34")	LPS95	T5 Electronic Ballast, Programmed Start, Low Watt, 0.95 Ballast Factor, <10% THD
			28T5	F28T5 (46")	HPS	T5 Electronic Ballast, Programmed Start, High Light Output, <10% THD
VOLTAGE		FINISH		OPTIONS		
UNV	120-277V	AL	Aluminum (Std.)	DM	Dimming Ballast ¹	
120	120V	WH	White	ARRA	Assembled in USA for Buy American Act	
277	277V	BK	Black			
		Available custom color (RAL) Please provide us with the RAL number.				

NOTES:
 1. Dimming Ballast options, see page 391.