


SVL LED

Project Name:	
Type:	

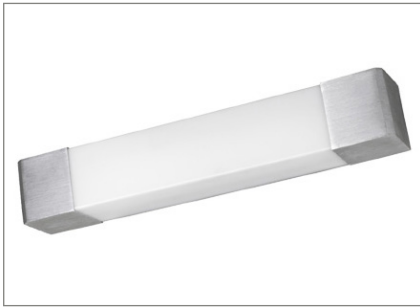

APPLICATION

Wall or ceiling corridor light. Acrylic diffuser with metal end caps. Ideal for use in public areas, corridors, locker rooms, laundry, bathrooms and work areas.

FEATURES:

- Aluminum end caps and an aluminum body.
- Extruded matte white acrylic diffuser.
- Natural aluminum finish as standard (AL)

MOUNTING:

- Surface wall mounting.
- Horizontal or vertical mount.
- Provided a universal mounting back for a standard 3" plaster ring or J-box.

LED:

- Color Temperature: 2700/3000/3500/4000/5000 (K).
- LED Module: High efficiency up to 140 LPW.
- Service life: Greater than 60,000 hours(L₇₀) minimizing maintenance frequency.
- Poke in wire connectors.
- Color variation within 3-step MacAdam ellipse.

ELECTRICAL:


- High power factor electronic driver, operate from a 120~277 Vac input range, 50 / 60 Hz.
- Dimming Control: 0-10V 10%~100%.
- Power Factor: +0.9
- Efficiency: +85%
- Ambient Operating Temperature: -22°F (-30°C) ~ 122°F (50°C).
- Constant Current, Class 2

ADA COMPLIANT:

- ADA requires all fixtures below 68" to have a maximum projection of 4".

LISTING:

- UL listed and labeled.
- Listed to UL 1598 and UL 8750.
- Suitable for damp locations.
- ADA compliant.
- ARRA compliant (optional).
- BAA compliant (optional).
- 5 years limited warranty.
- 7 or 10 years limited warranty. (optional) ²
- Bluetooth Mesh System available, please contact factory for more information.

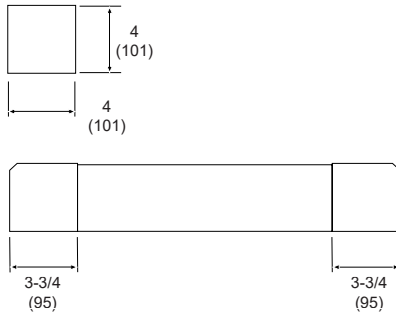

Specifications:

Length: 23-7/8 (606)
 35-7/8 (911)
 47-7/8 (1216)
 Width: 4 (101)
 Height: 4 (101)

All dimensions are in inches (millimeters).

CONFIGURATIONS


	Input Watts	Lumen Output	Lumen Efficiency
18L	18W	1399 lm	77.7 lm/W
22L	22W	1709 lm	77.7 lm/W
32L	32W	2803 lm	87.6 lm/W
41L	41W	3952 lm	96.4 lm/W

Zone	Lumens	% of Luminaire
0-40	609	12.9%
0-60	1172	27.0%
0-90	2312	48.9%
90-180	2417	51.1%


: Based on 5000K.

SVL LED


SVL-2-18LED





SVL-2-22LED



SVL-3-32LED



SVL-4-41LED

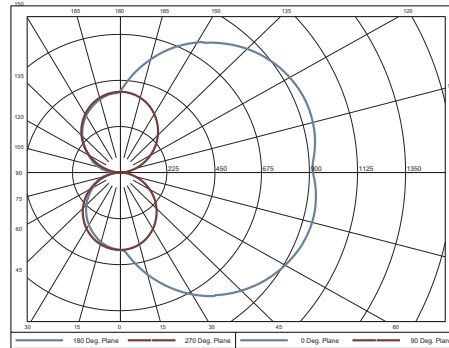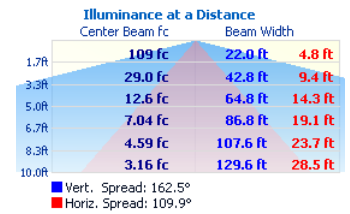

COMPATIBLE DIMMER SWITCH (TABLE 1)

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Leviton>	IllumaTech IP7 series
		<Lutron>	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver.
		<Philips>	Sunrise : SR1200ZTUNV
ES566	eldoLED SOLOdrive	<Busch-Jaeger>	2112U-101
		<Jung>	240-10
		<Leviton>	IllumaTech - IP710-DLX
		<Lightoller Controls>	ZP600FAM120
		<Merten>	5729
		<Pass & Seymour>	CD4FB-W
		<Wattstopper>	DCLV1
		<Sensor Switch>	nIO EZ
		<Synergy>	ISD BC
		<ABB>	SD/S 2.16.1
LDE1	Lutron 5-Series EcoSystem	<Lutron>	PowPak Dimming Modules: RMJ-ECO32-DV-B, FCJ/FCJS-ECO 1,2 Energizer Node (120V only): QSN-1ECO-S, QSN-2ECO-S GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGR-J- E(wireless) QSGR- E Quantum Hub (120V only): QP2-__2C/4C/6C/8C Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D
		<Lutron>	Diva DV-600P, SkyLark S-600P, Ariadni AY-600P, Ariadni TG-603P, Maestro MA-600 (Digital), Diva CFL/LED DVCL-153P, Satin Colors DVSC-600P-SW
TDM	KEYSTONE	<Lutron>	6641, IllumaTech IPI06-1LX, ToggleTouch TGI06-1LW (Digital)
ELV	KEYSTONE	<Lutron>	MAELV-600BL (Digital), DVELV-300P, SkyLark SELV-300P


NOTES:

- All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command. For more detail on adjusting low-end light level refer to Application Note#556 at www.lutron.com.
- For the Line/Hot (L/H) terminal on the driver, it is preferred not to use the switched hot (red) wire from the control but rather the hot wire directly from the power source.


SVL LED

ORDERING INFORMATION

EXAMPLE: SVL-2-22L-40K-UNV-AL-DM

MODEL	LENGTH		LED		COLOR TEMP.		EFFICACY		CRI		VOLTAGE	
SVL	2	2' Length	18L 22L	18W LED 25W LED	-27K	2700K ³	(Blank) HE	Standard High Efficacy 	(Blank) C9	80+ CRI 90+ CRI ⁴	UNV	120-277V
	3	3' Length	32L	37W LED	-30K	3000K						
	4	4' Length	41L	49W LED	-35K	3500K						
			xxL	Choose wattage for SDM option	-40K	4000K						
				-50K	5000K							

* Contact factory for custom wattage or lumen requirement.

FINISH		LED DRIVER		OPTIONS	
AL AMB	Aluminum (Std.) Anti-Microbial Coating (Matte Skye White) <small>* Available custom color (RAL) Please provide us with the RAL number.</small>	DM DM1 SD50 LDE1 ELV PHSR TDM  BLT	Dimming Driver (0-10V 10%~100%) (Std.) Dimming Driver (0-10V 1%~100%) Step Dimming Driver ¹ Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim (120V only) ELV compatible (reverse-phase or trailing-edge), (120V only) Philips Xitanium Sensor-Ready, Dali 5%~100% dim Triac Dim. (120V only) Bluetooth Mesh System (contact factory for more information)	ARRA BAA O7W O10W GTD GTD10DIM EMG8 EMG15 EMG20 EMG25	Assembled in USA for Buy American Act Buy American Act compliant Optional 7 Years Limited Warranty ² Optional 10 Years Limited Warranty ² Bodine Generator Transfer Device Bodine Generator Transfer Device (0-10VDC Dimmer Override) 1296 LUMEN EM Battery Backup (CEC Compliant EM) ^{5,6} 2430 LUMEN EM Battery Backup (CEC Compliant EM) ^{5,6} 3240 LUMEN EM Battery Backup (CEC Compliant EM) ^{5,6} 4050 LUMEN EM Battery Backup (CEC Compliant EM) ^{5,6}

LIGHTING CONTROL SYSTEM	
LUTRON VIVE	<Lutron Vive System Enabled>  Click Here!
PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)

NOTES:

- Lumens and watts per foot may differ for STEP drivers, consult factory.
- This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation.
- Available with C9 only.
- Lumen per watt is around 15% less than standard CRI (80+)
- Contact factory for other emergency ballast options.
- Only available on 3ft and 4ft housing.