


TP LED

Project Name:	
Type:	

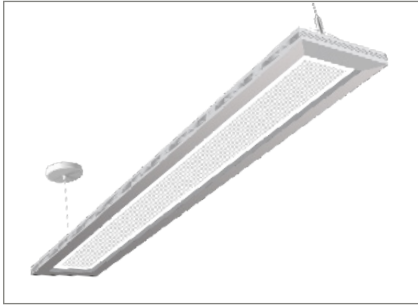

APPLICATION

TP LED luminaire is a direct/indirect pendant offering a unique design. The transparent diffuser in the center provides both efficiency and design statement to any space. A field adjustable color temperature suits perfect design for any commercial, general office, banking, retails and educational environments.

FEATURES:

- Downlight 53.4%, Uplight 46.6%.

MOUNTING:

- Pendant mount.

LED:

- High quality array LEDs.
- Color Rendering Index: >80
- Field adjustable color temperature: 3000/3500/4000(K)

FINISH:

- White finish.

ELECTRICAL:

- 0-10V dimming.
- 120-277V, 50/60Hz
- Power Factor: >0.90
- THD: <20%

LISTING:

- UL listed.
- DLC listed.
- Suitable for damp location.
- 5 years warranty.

CONFIGURATIONS

Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
TP	4FT	40LED	40W	4254 lm	106.35 lm/W
	8FT	80LED	80W	8508 lm	106.35 lm/W

ORDERING INFORMATION

EXAMPLE: TP-IND-4-40LED-30/35/40K-UNV

MODEL	LENGTH	LED	COLOR TEMP.	VOLTAGE	MOUNTING
TP-IND TP-CON ¹	4 8 4' Length 8' Length	40LED 80LED 40W 80W	-30/35/40K Selectable 30/35/40K	UNV 120-277V	(Blank) Pendant


* Number of circuit(s) should be determined by the customer prior to ordering the continuous run considering the AC input voltage and total run wattage.

CEILING TYPE	SUSPENSION LENGTH	PRESET	OPTIONS	LIGHTING CONTROL SYSTEM
X1 X2 T-bar Ceiling Hard Ceiling	AC48 Adjustable Aircraft Cable Canopy 48"L	(Blank) PS Non-Preset Preset Request <small>* Factory default setting: 35K</small>	REM15 REM20 15W remote EM for field install 25W remote EM for field install	PPA102S <Bluetooth> Bluetooth Powerpack (Consult factory for installation location)

NOTES:

1. Max number of fixtures for continuous run: total 36FT @ 120V, total 80FT @ 277V



LED INDOOR ARCHITECTURAL SUSPENDED DIRECT/INDIRECT LINEAR LIGHT

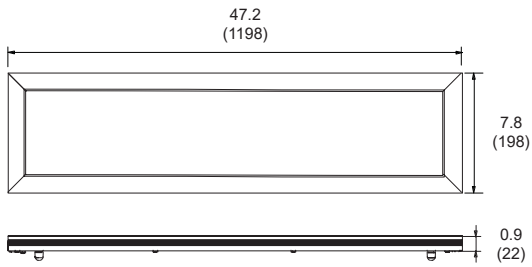

All dimensions are in inches (millimeters).

COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Lutron>	Diva DDTV

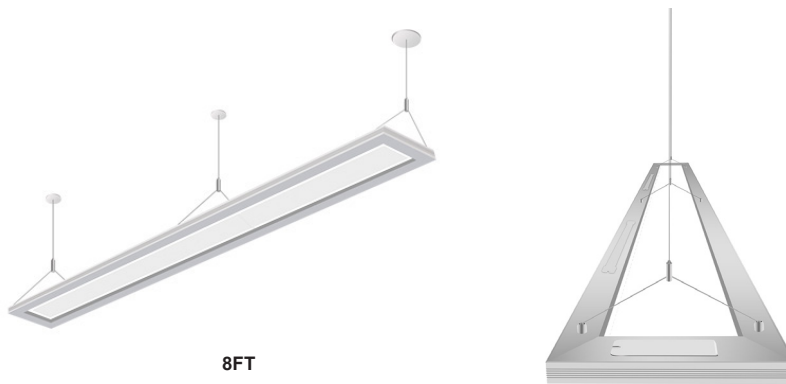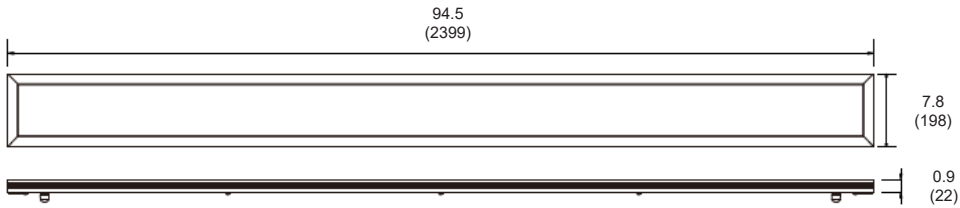

TP-4-40LED

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
1.7ft	174 fc	7.7 ft	11.8 ft
3.3ft	46.2 fc	15.0 ft	23.0 ft
5.0ft	20.1 fc	22.8 ft	34.8 ft
6.7ft	11.2 fc	30.5 ft	46.6 ft
8.3ft	7.30 fc	37.8 ft	57.8 ft
10.0ft	5.03 fc	45.6 ft	69.6 ft

■ Vert. Spread: 132.6°
■ Horiz. Spread: 147.9°

