


UDL5 LED

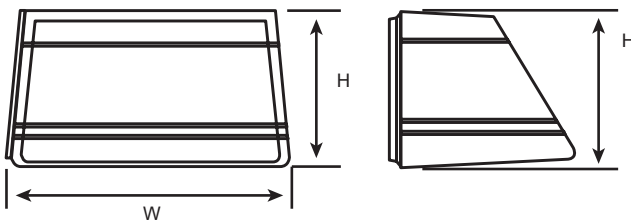

Specifications: UDL5

Height: 6-1/4 (158)
 Width: 11-3/8 (289)
 Depth: 7-5/8 (194)
 Weight: 9.22 lbs (4.18 kg)

All dimensions are in inches (millimeters).

Model	Wattage	B.U.G. Rating
UDL5	13W	B1-U1-G1

APPLICATION

The trapezoid wall sconce down light is ideal for walkways, building exterior walls, parking areas, entrances, underpasses, loading docks and recreation areas. Wall mounting height requires between 8 feet and 15 feet below.

FEATURES:

- Full cut-off dark sky compliant fixtures.
- Heavy duty die-cast aluminum housing on which electrical components are mounted for maximum heat dissipation.
- Silicone rubber gasket included to prevent dirt or moisture from outside.
- Architectural dark bronze finish standard. Also available in white or black finish.
- One piece high reflectance aluminum reflector designed for desired light efficiency.
- Provide down light only.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

REFLECTOR & COVER:

- High efficiency anodized aluminum reflector with wide beam spread.
- Heat and impact resistant tempered clear glass lens.

ELECTRICAL:

- LED input 23W drives 13 LEDs.
- CREE XTE LED.
- Min. 1200 lumen output.
- LEDs have nominal 5000K color.
- Input Voltage: 120V-277V, 50/60Hz.

LISTING:

- UL/ CUL listed.
- Suitable for wet location.
- 5 years limited warranty.

ORDERING INFORMATION


EXAMPLE: UDL5-13LED-50K-UNV-BZ

MODEL		LED		COLOR TEMP.		VOLTAGE	
UDL5	13LED	23W LED Input Power		-50K	5000K (Std.)	UNV	120-277V (Std.)
FINISH				OPTIONS			
BZ	Dark Bronze (Std.)			PC1	With Photocell - Button Type 120V		
	* Available custom color (RAL) Please provide us with the RAL number. * Non-standard finish with extra charge.			PC2	With Photocell - Button Type 277V		
				BG	Bird Guard, Stainless Steel Spikes		


UDL5 LED

Distribution Data (UDL5-13LED-UNV-BZ(19.5W))

Polar Candela Distribution

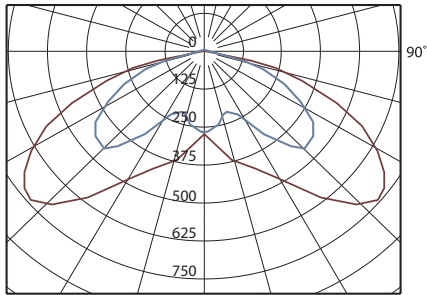

Illuminance at a Distance

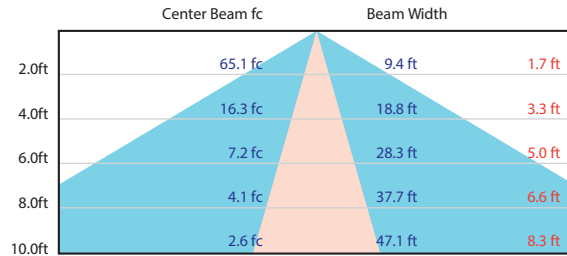

Vert. Spread: 134.0°
 Horiz. Spread: 44.9°