

UDL7-2G

| | |
|---------------|--|
| Project Name: | |
| Type: | |



APPLICATION

The half sphere wall sconce down light is ideal for walkways, building exterior walls, parking areas, entrances, underpasses, loading docks and recreation areas. Wall mounting height requires between 8 feet and 15 feet below.

FEATURES:

- Full cut-off LED wall pack.
- Die-cast aluminum housing with UV stabilized powder coated finish.
- Architectural dark bronze finish standard. Custom color available upon request.
- Field adjustable wattage.
- Optional occupancy sensor, EM, photocell.

MOUNTING:

- Wall mount (quick mount plate included).
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

LENS & COVER:

- Low glare providing visual comfort.
- Impact resistant tempered clear glass lens.
- Forward and Wide Throw available.

LED:

- CRI 70+
- Color Temperature: 4000/5000(K)
- Down only: up to 121lm/W

ELECTRICAL:

- Input Voltage: 120V-277V, 50/60Hz.
- Optional: 10KV surge protector.

LISTING:

- UL/CUL listed.
- Listed to UL 1598 and UL 8750.
- DLC listed. ¹
- Suitable for wet location.
- 5 years limited warranty.
- BAA compliant (Buy American Act).


CONFIGURATIONS

| Model | Input Watts | Lumen Output (4000K) | Lumen / Watts (4000K) | Lumen Output (5000K) | Lumen / Watts (5000K) |
|---------|-------------|----------------------|-----------------------|----------------------|-----------------------|
| UDL7-2G | 18W | 2142 lm | 119 lm/W | 2178 lm | 121 lm/W |
| | 33W | 3927 lm | | 3993 lm | |
| | 49W | 5831 lm | | 5929 lm | |
| | 68W | 8153 lm | | 8265 lm | |

MS (sensor) FACTORY SETTING (TABLE 1)

| | |
|------------------------|---------|
| Detection Area | 100% |
| Hold-time | 5 min |
| Daylight sensor | Disable |
| Stand-by period | 30 min |
| Stand-by dimming level | 50% |

* See a separate attachment to find more setting options.

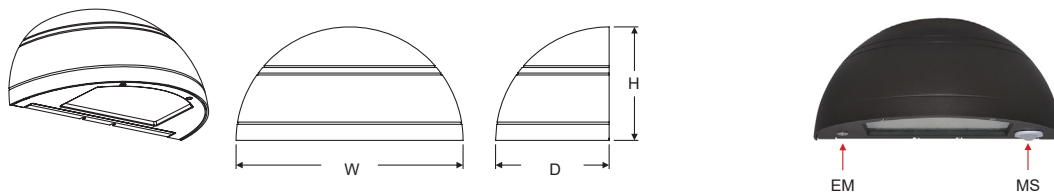

Height: 9.05 (230)
 Width: 18.1 (460)
 Depth: 9.05 (230)

* All dimensions are in inches (millimeters).

UDL7-2G

ORDERING INFORMATION

EXAMPLE: UDL7-2G-FT-33SLED-40K-UNV-BZ


| MODEL | REFLECTOR | | LED | | COLOR TEMP. | | VOLTAGE | | FINISH | |
|---------|------------------------|-----------------------------|-------------|--------------------------------|----------------------------|----------------|------------|-----------------|--|---|
| UDL7-2G | FT WT | Forward Throw Wide Throw | SLED | Selectable 18/33/49/68W LED | -40K -50K | 4000K 5000K | UNV | 120-277V (Std.) | BZ *BK *WH **CC | Dark Bronze RAL#7022 (Std.) Black White Custom Color <small>* Non-standard finish with extra charge. ** Additional charge & set up fee.</small> |

| OPTIONS | |
|---------------|--|
| MS | Occupancy Sensor with Daylight, adjustable via DIP switch ² |
| RC-100 | Remote control for MS |
| EM8 | 8W Emergency Battery Backup |
| CWEM10 | 10W EM Pack for Cold Weather (-20°C ~ 55°C) |
| SP10 | 10Kv Surge Protector |
| BAA | BAA(Buy American Act) and BABA(Build America Buy America) compliant |
| MG | Marine Grade Finish |

NOTES:

- DesignLights Consortium (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- Refer to Table 1 and a separate attachment to find more information.

Forward Throw
(FT)



Wide Throw
(WT)

