

# ULP-2G-7P-5C

Project Name:	
Type:	



### APPLICATION

The LED Backlit Panel provides soft, even illumination for recessed T-grid ceiling applications. The latest in panel design, backlit panels provide more diffused illumination on the lens and are more efficient in lighting a space. CCT adjustable and wattage adjustable ensure the right products are available for any application.

### FEATURES:

- 27-gauge(0.4mm) metal sheet housing with powder coated finish.
- Aluminum frame in white finish.
- Housing is free of holes to prevent debris/bug intrusion.
- Field adjustable wattage and color temperature.
- Polystyrene lenses over LEDs, PD diffuser.

### LED:

- Lumen efficiency  $\geq 128$  lm/W
- Field adjustable color temperature: 3000/3500/4000/5000/6500 (K)
- 5CCT Adjustable options.
- Field adjustable wattage.
- 7 Powers selectable option.
- Power factor:  $>0.9$  nominal.
- CRI:  $>80$
- $L70 \geq 50,000$  hours

### MOUNTING:

- Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment.
- Surface mount and suspension mount cable kit accessories are available. (optional)

### ELECTRICAL:

- 0-10V dimming, down to 10%
- 120-277V, 120-347V, 50/60Hz
- Operating temperature: -4°F to 104°F (-20°C to 40°C)

### LISTING:


- UL listed for dry and damp location.
- DLC listed.
- LM-79, LM-80
- 5 years limited warranty.
- BAA compliant (optional).

### CONFIGURATIONS


Size	LED	Lumen Output	Lumen Efficiency
1' x 4'	7P 15/20/25/30/35/40/50W LED	1920/2560/3200/3840/4480/5120/6400 lm	128 lm/W
2' x 2'			
2' x 4'	7P2 20/25/30/40/50/60/70W LED	2560/3200/3840/5120/6400/7680/8960 lm	

\* Indication that the lumen output is nominal.


Specifications: ULP-2G 1'x4'



Specifications: ULP-2G 2'x4'

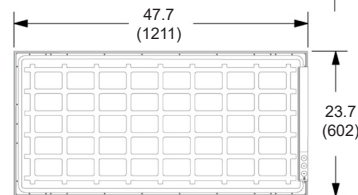

Specifications: ULP-2G 2'x2'



# ULP-2G-7P-5C

**ORDERING INFORMATION**

*EXAMPLE: ULP-2G-22-7P-5C-UNV-DM*

MODEL	SIZE		LED	COLOR TEMP.		MOUNTING		VOLTAGE			
ULP-2G	14	1' x 4'	7P	15/20/25/30/35/40/50W LED Adjustable	5C	3000/3500/4000/5000/6500K Adjustable		<b>(Blank) FK SMK AC</b>	Recessed T-bar Flange Kit for Hard Ceiling <sup>1</sup> Surface Mounting Kit <sup>1</sup> Aircraft Cable <sup>2</sup>	UNV	120-277V
	22	2' x 2'	7P	15/20/25/30/35/40/50W LED Adjustable	5C	3000/3500/4000/5000/6500K Adjustable					
	24	2' x 4'	7P2	20/25/30/40/50/60/70W LED Adjustable	5C	3000/3500/4000/5000/6500K Adjustable					

LED DRIVER		OPTIONS	
DM	0-10V 10%~100% (Std.)	EM15 EM25 BAA SP10	2430 Lumen EM Battery Backup 4050 Lumen EM Battery Backup BAA(Buy American Act) and BABA(Build America Buy America) compliant Integrated 10kV/10kA surge protection

**NOTES:**

- Supplied in separate boxes, field installed.
- The whole cable length from ceiling to fixture is 66".