

W

Project Name:	
Type:	



APPLICATION

Specification grade surface ceiling-mount standard wraparound fixture delivers diffuse moderate light. It is the economical, energy-efficient and low-profile choice for small to medium size offices, retail spaces, classrooms and storage rooms.

FEATURES:

- 100% acrylic, injection molded prismatic basket diffuser with flat bottom and vertical sides.
- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- End caps are same material as housing.
- Lens are capable of being hinged from either side for easy cleaning and service.
- Models available with 2, 3 and 4 lamps in single or tandem.
- 2 Lamps type available with in wide housing.
- 8 foot tandem type; comes with 2 pieces 4 foot lens.
- Finish is high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance.

MOUNTING:

- Surface or stem mount.
- Steel end plates with 7/8" KO standard for continuous row mounting option.
- Compatible with most ceiling types.

LAMP:

- Standard T8, T5 and T5HO lamps are available.
- Pressure-lock lamp holders or easy twist lock lamp sockets.
- Lamp not included.

ELECTRICAL:


- High power factor instant start electronic ballast for T8 lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- High power factor programmed start electronic ballast for T5 and T5HO lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- Ballast disconnect plug provided as standard.

LISTING:

- UL/CUL listed and labeled.
- Suitable for damp locations.
- ARRA compliant (optional).

CONFIGURATIONS

Series	Size	# Of Lamps	Lamp Type
W	3'	2, 4	21T5, 25T8, 39T5HO
	4'	2, 3, 4	25T8, 28T5, 28T8, 32T8, 54T5HO
	8'	4	25T8, 28T5, 28T8, 32T8, 54T5HO

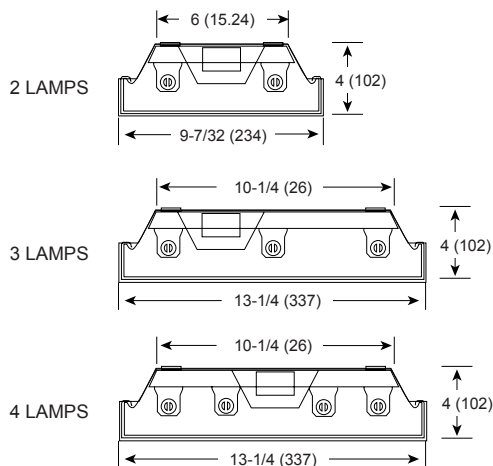

Specifications: 3', 4', 8' (2L)

Length: 36 (914), 48 (1219), 96 (2438)
 Width: 9-7/32 (234)
 Depth: 4 (102)


Specifications: 3', 4', 8' (2L, 3L & 4L)

Length: : 36 (914), 48 (1219)
 Width: 13-1/4 (337)
 Depth: 4 (102)

All dimensions are in inches (millimeters).

Wiring diagram for LED ready

Applied AC voltage depends on LED tube spec.

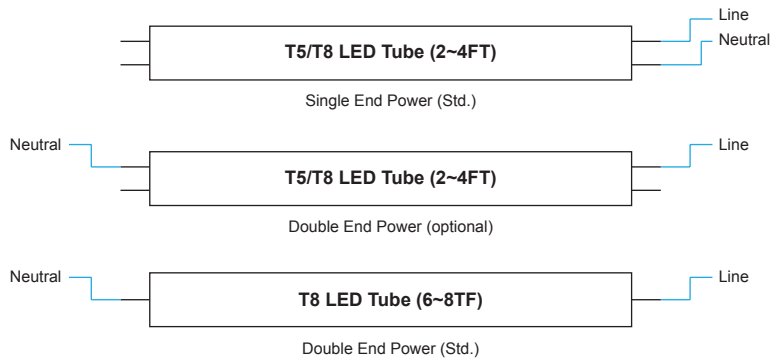

ORDERING INFORMATION

EXAMPLE: W4-432-UNV

MODEL	LENGTH	WIDTH	# OF LAMPS	LAMP TYPE	DIFFUSER	BALLAST
W	3 3' Length 4 4' Length 8 8' Length ¹	(Blank) Narrow W Wide ²	2 3 4	14T5 F14T5 (22") 21T5 F21T5 (34") 28T5 F28T5 (46") 17 F17T8 (24") 25 F25T8 (36") 25T8 F25T8 (48") 28T8 F28T8 (48") 32 F32T8 (48") 24T5HO F24T5HO (22") 39T5HO F39T5HO (34") 54T5HO F54T5HO (46")	(Blank) Acrylic Lens	(Blank) T8 Electronic Ballast, Instant Start, <10% THD or T5 Electronic Ballast, Programmed Start, <10% THD LBF T8 Electronic Ballast, Instant Start, Low Watt, <10% THD HBF T8 Electronic Ballast, Instant Start, High Light Output, <10% THD PS T8 Electronic Ballast, Programmed Start, <10% THD LPS Electronic Ballast, Programmed Start, Low Watt, <10% THD HPS Electronic Ballast, Programmed Start, High Light Output, <10% THD

# OF BALLAST	VOLTAGE	OPTIONS
(Blank) Standard configuration; 2L - 1/2L 3L - 1/3L 4L - 1/4L 6L - 1/2L & 1/4L 8L - 1/4L & 1/4L 2/2 2-Ballasts, 4 Lamp 3/3 2-Ballasts, 6 Lamp * / * other ballast configuration options as specified.	UNV 120-277V 120 120V 277 277V 347 347V	AB Two Ballast for AB Switch EM Emergency Ballast ³ EMC CEC compliant EM ⁶ DM Dimming Ballast ⁴ GLR Fast Blow Fuse ⁵ GMF Slow Blow Fuse ⁵ ARRA Assembled in USA for Buy American Act DEP Double End Power for LED ready

NOTES:

- For tandem double-length unit. (Example): W8-432
- W- ; 2 lamp and tandem for wide housing. (not available in 8FT length), (Example): W3-W225, W4-W232
- Emergency Ballast options, see page 390.
- Dimming Ballast options, see page 391.
- Must specify voltage, not available with 347V.
- Check with factory for more details.